

Technical drawing of the STB-R100 device, showing three views: Front View, Top View, and Side View.

**Front View:** The device is rectangular with a width of 200 mm and a height of 140 mm. It features a central ventilation grille consisting of three rows of 10 oval slots each. The top edge has a recessed area containing four ports (two USB-A, one USB-C, and one Ethernet), a power button, and a status indicator. The bottom edge has a recessed area with two small square ports.

**Top View:** Shows the top surface of the device, which is flat and rectangular with rounded corners. It features a central ventilation grille consisting of three rows of 10 oval slots each. The top edge has a recessed area containing four ports (two USB-A, one USB-C, and one Ethernet), a power button, and a status indicator. The bottom edge has a recessed area with two small square ports.




**Side View:** Shows the side profile of the device, which is rectangular with a width of 40 mm and a height of 140 mm. It features a central ventilation grille consisting of three rows of 10 oval slots each. The top edge has a recessed area containing four ports (two USB-A, one USB-C, and one Ethernet), a power button, and a status indicator. The bottom edge has a recessed area with two small square ports.

**Dimensions:**

- Width: 200 mm
- Height: 140 mm
- Depth: 40 mm

**Tolerance Table:**

| Tolerance grade | A      | B         | C     | Scale       | MODEL NAME | STB-R100 |          |             |
|-----------------|--------|-----------|-------|-------------|------------|----------|----------|-------------|
| 1 - 10          | ± 0.05 | ± 0.1     | ± 0.2 | Drawn       | Designed   | Checked  | Approved | Drawing no. |
| 10 - 100        | ± 0.1  | ± 0.2     | ± 0.2 |             |            |          |          |             |
| 100 - 300       | ± 0.3  | ± 0.5     | ± 1   |             |            |          |          |             |
| 300 - 1000      | ± 0.6  | ± 1.0     | ± 5   |             |            |          |          |             |
| 1000 - 5000     | ± 1.0  | ± 1.0     | ± 10  |             |            |          |          |             |
| Third angle     | Stn    | Dimension | mm    | 보문전자방송통신(주) |            |          |          |             |

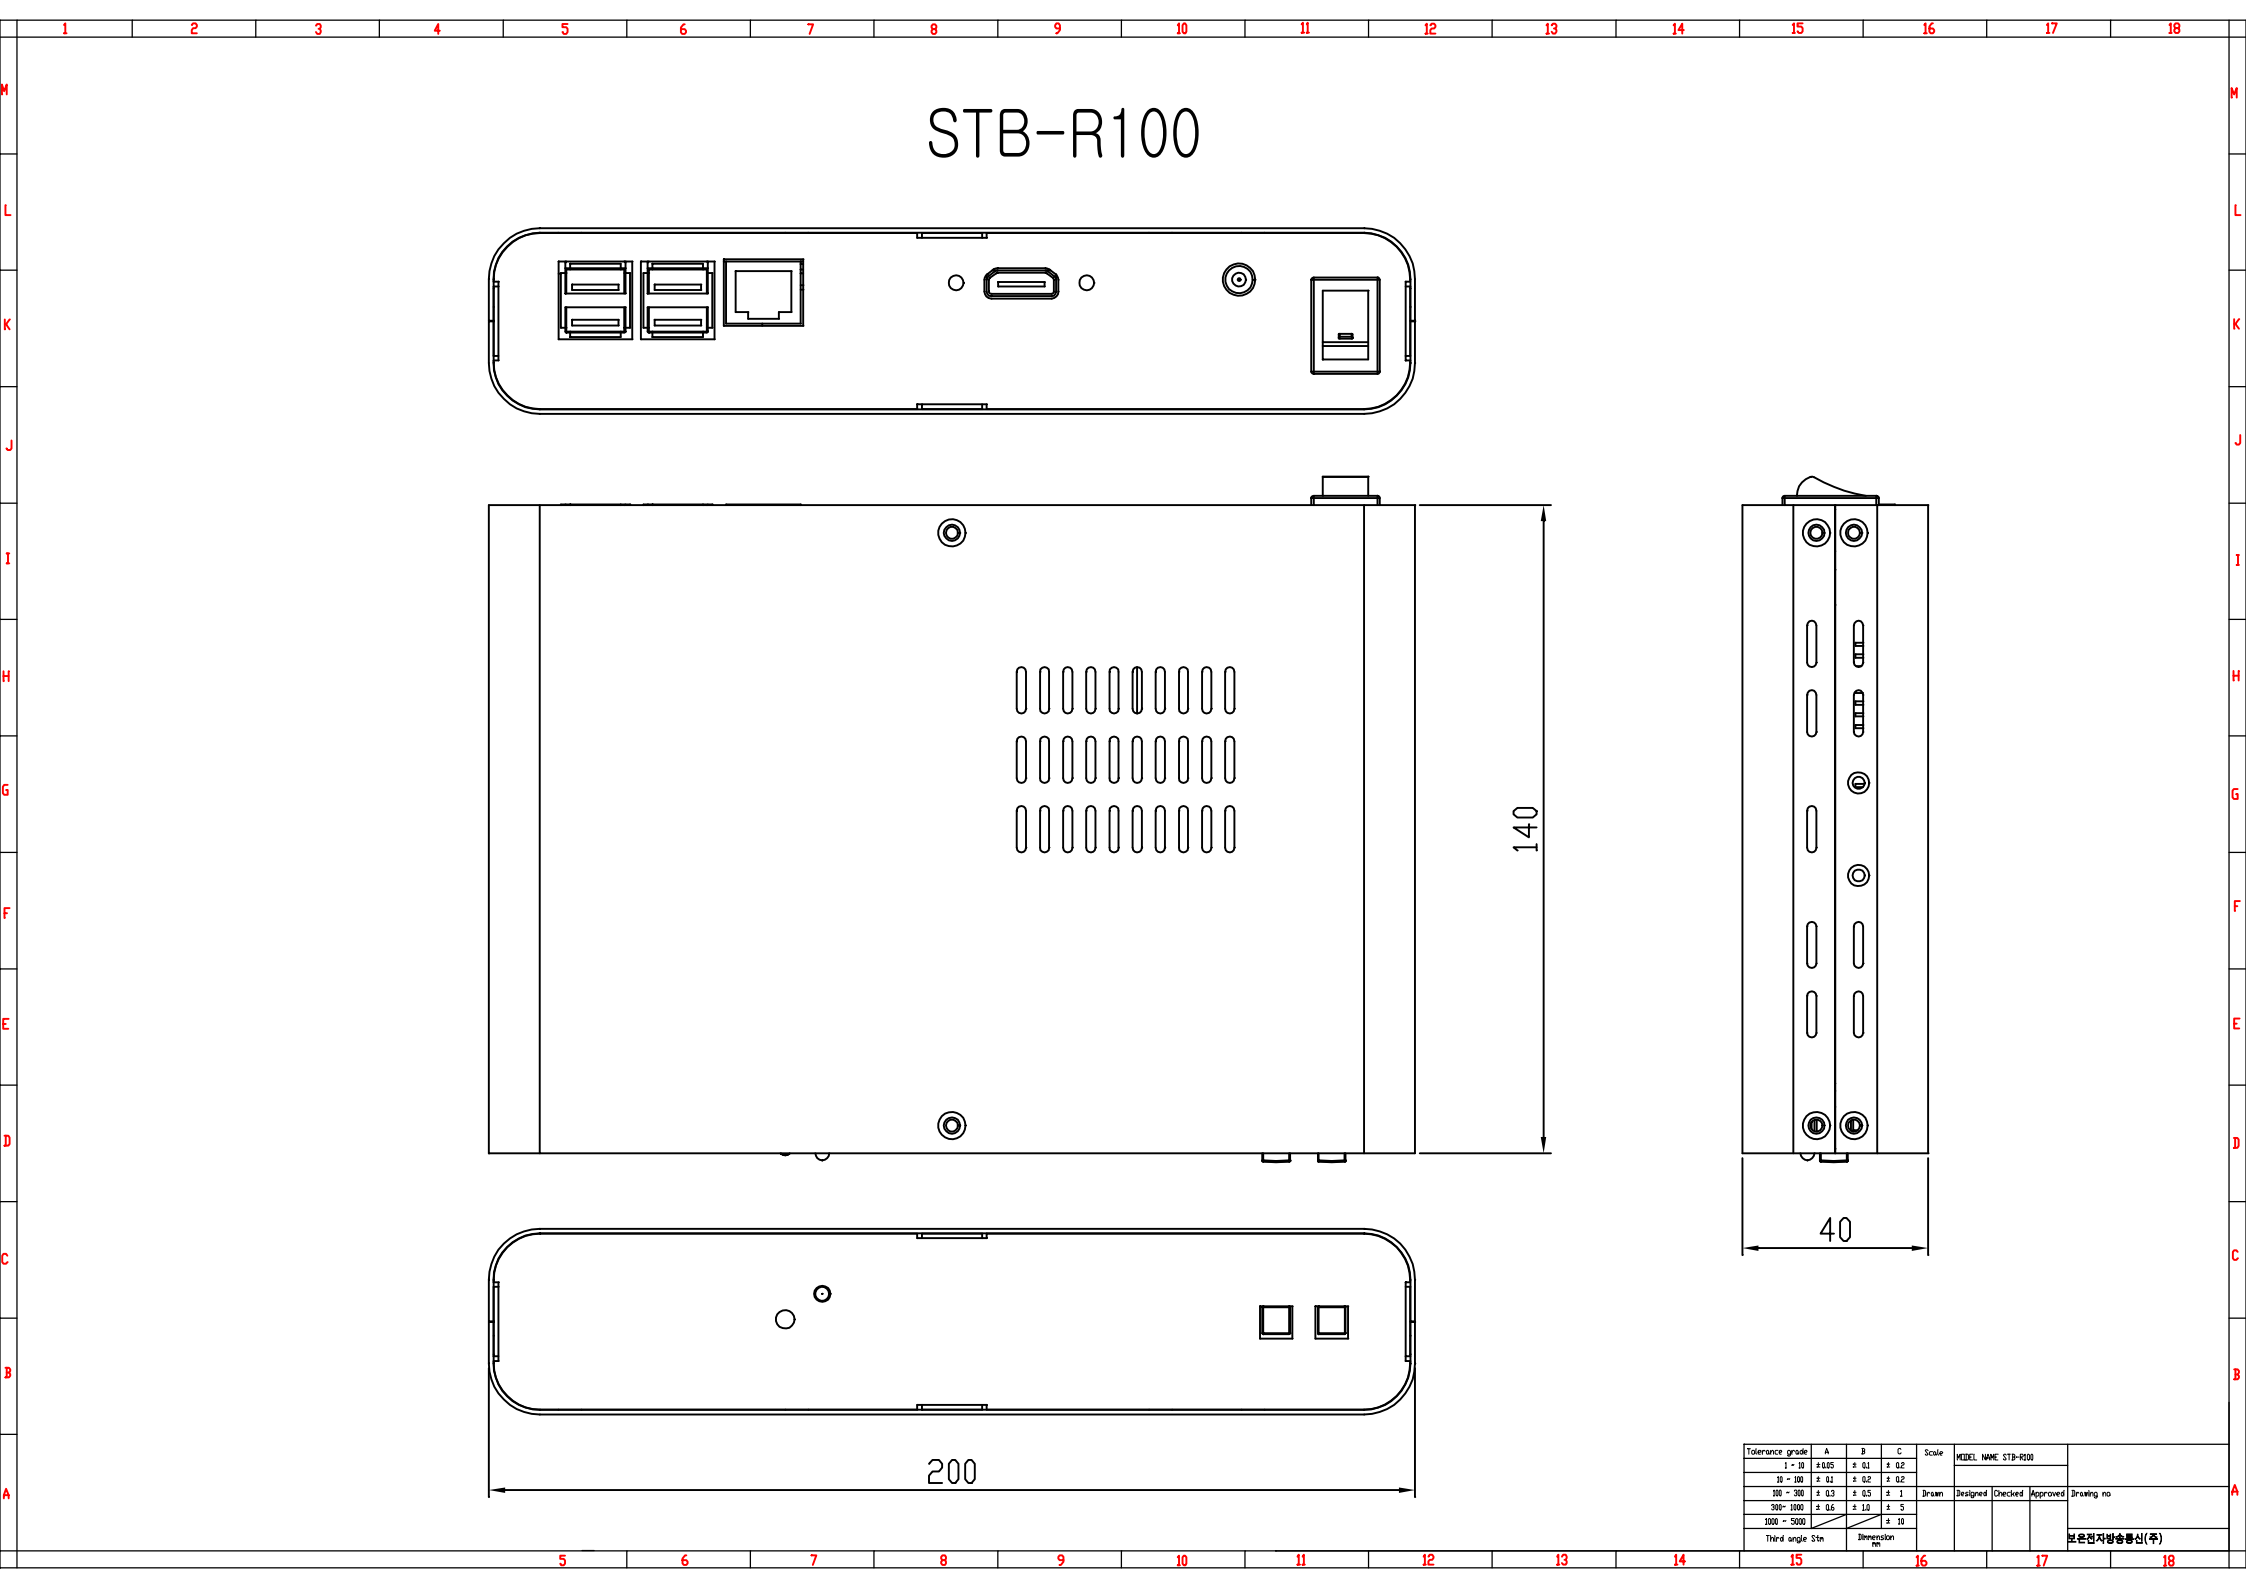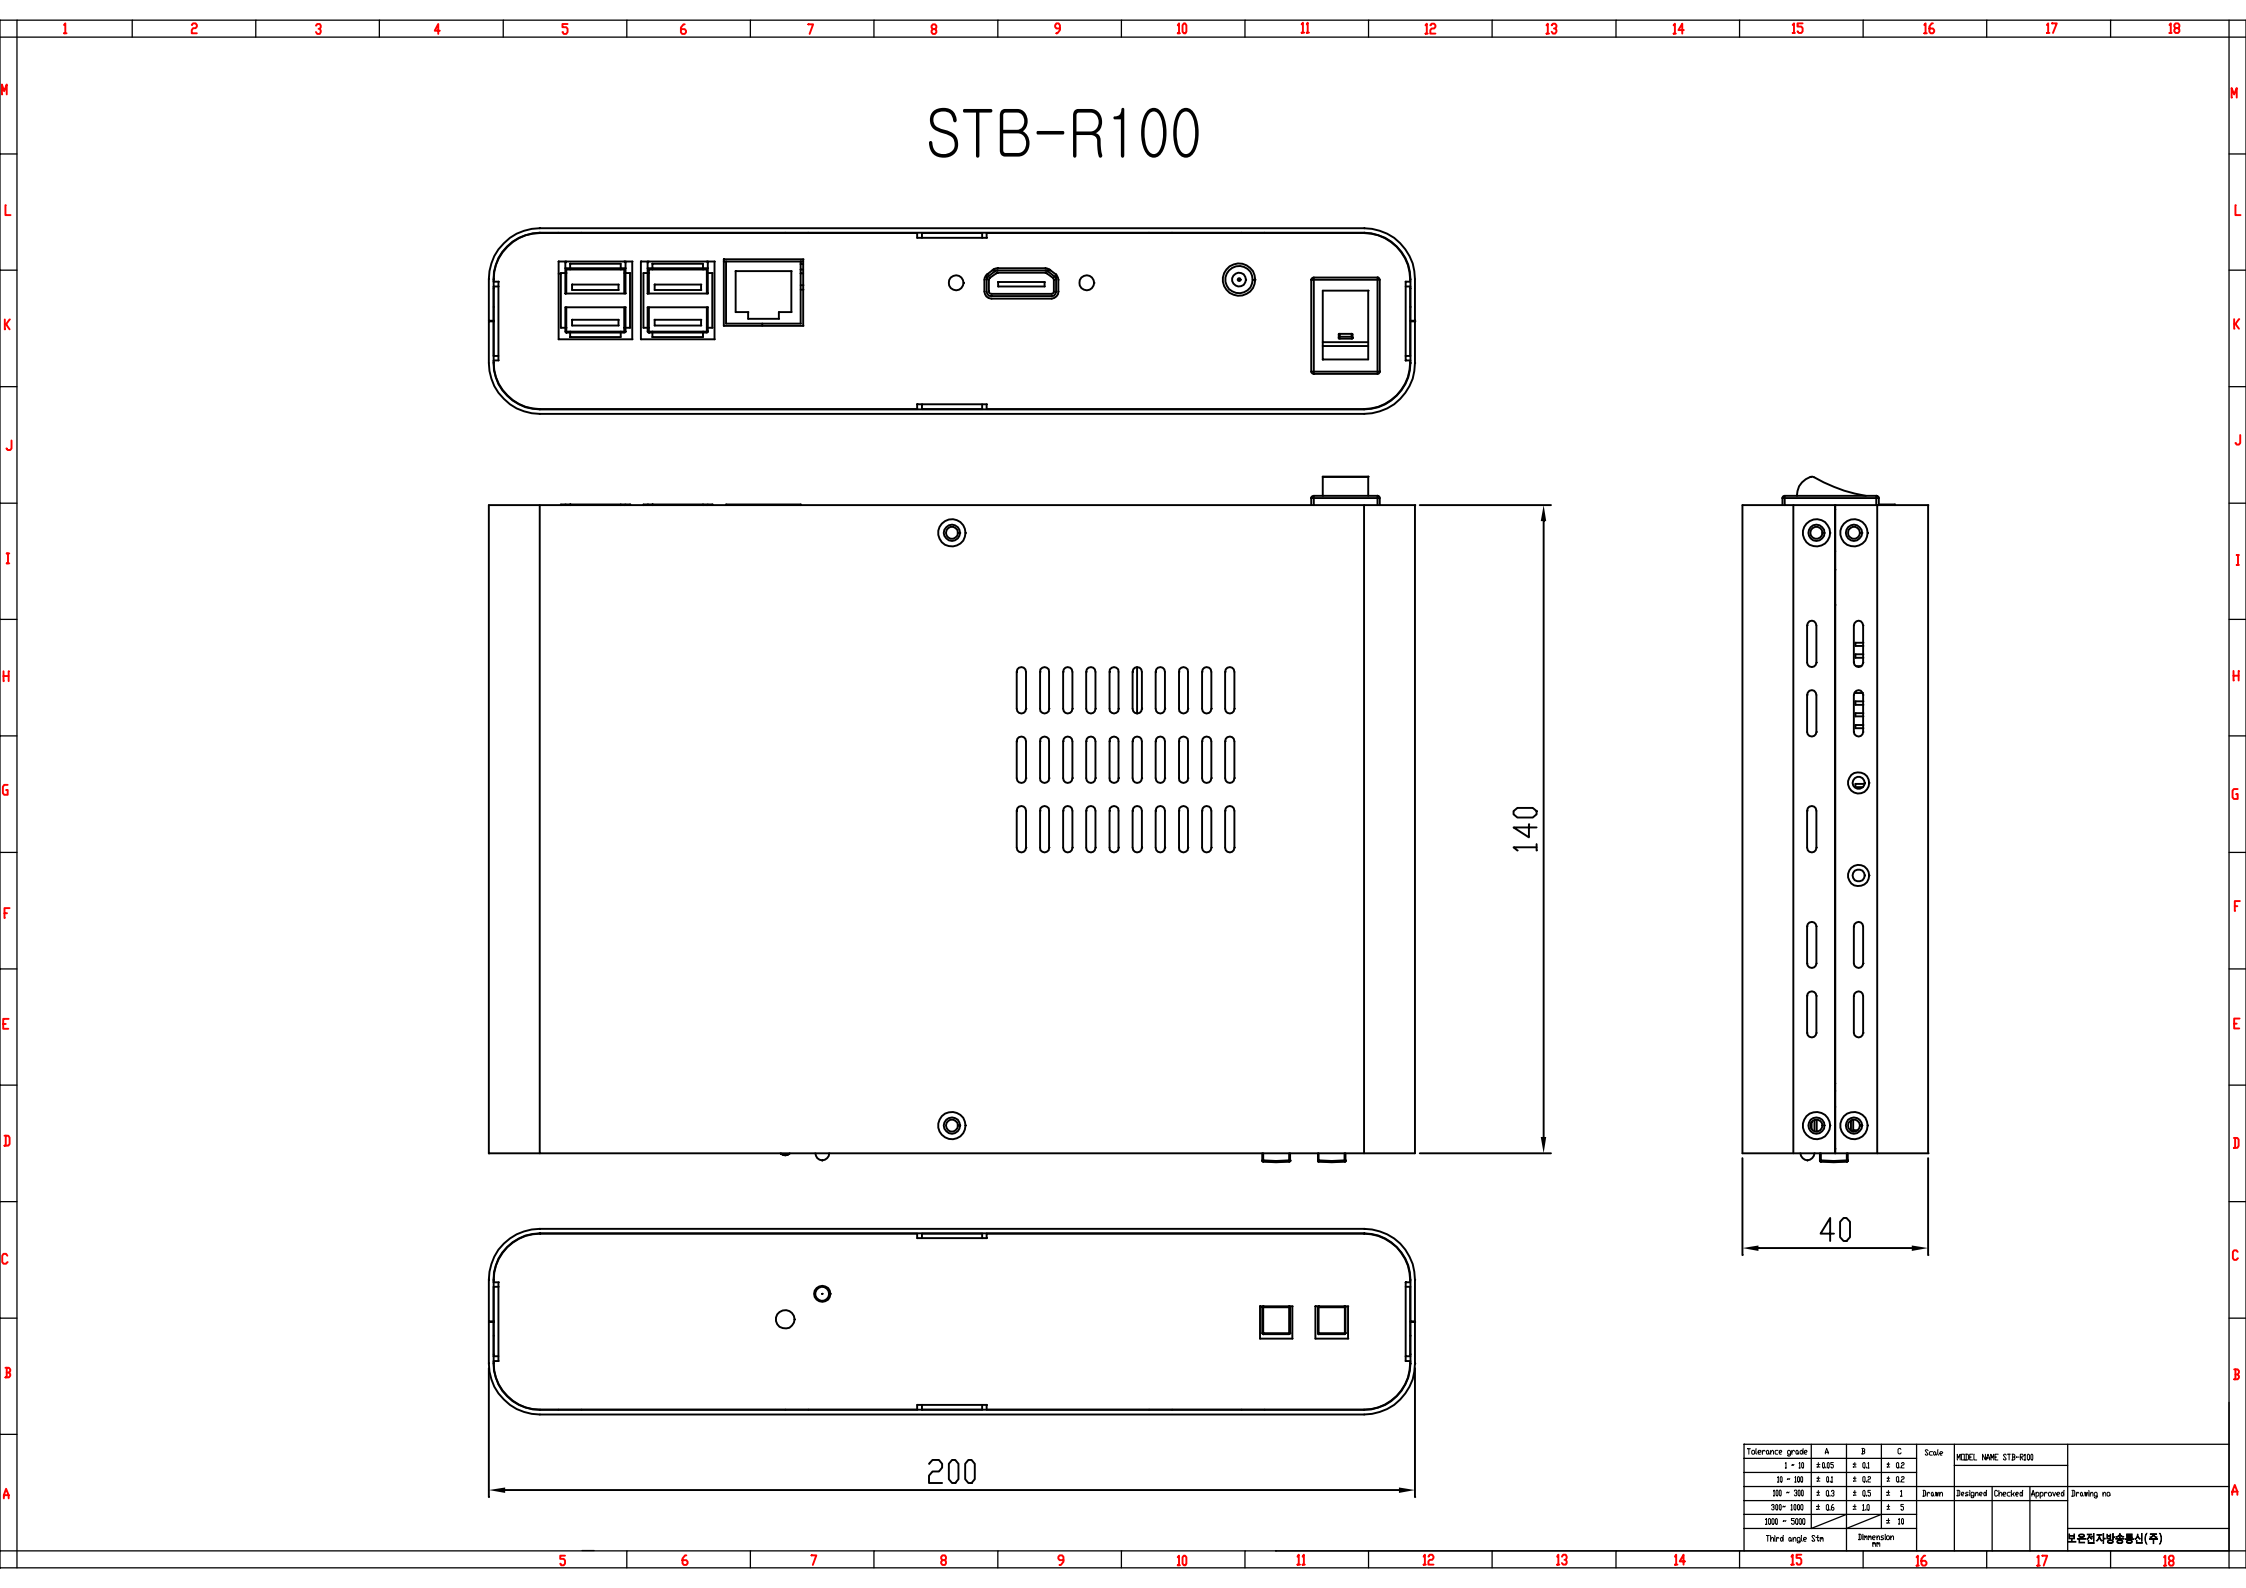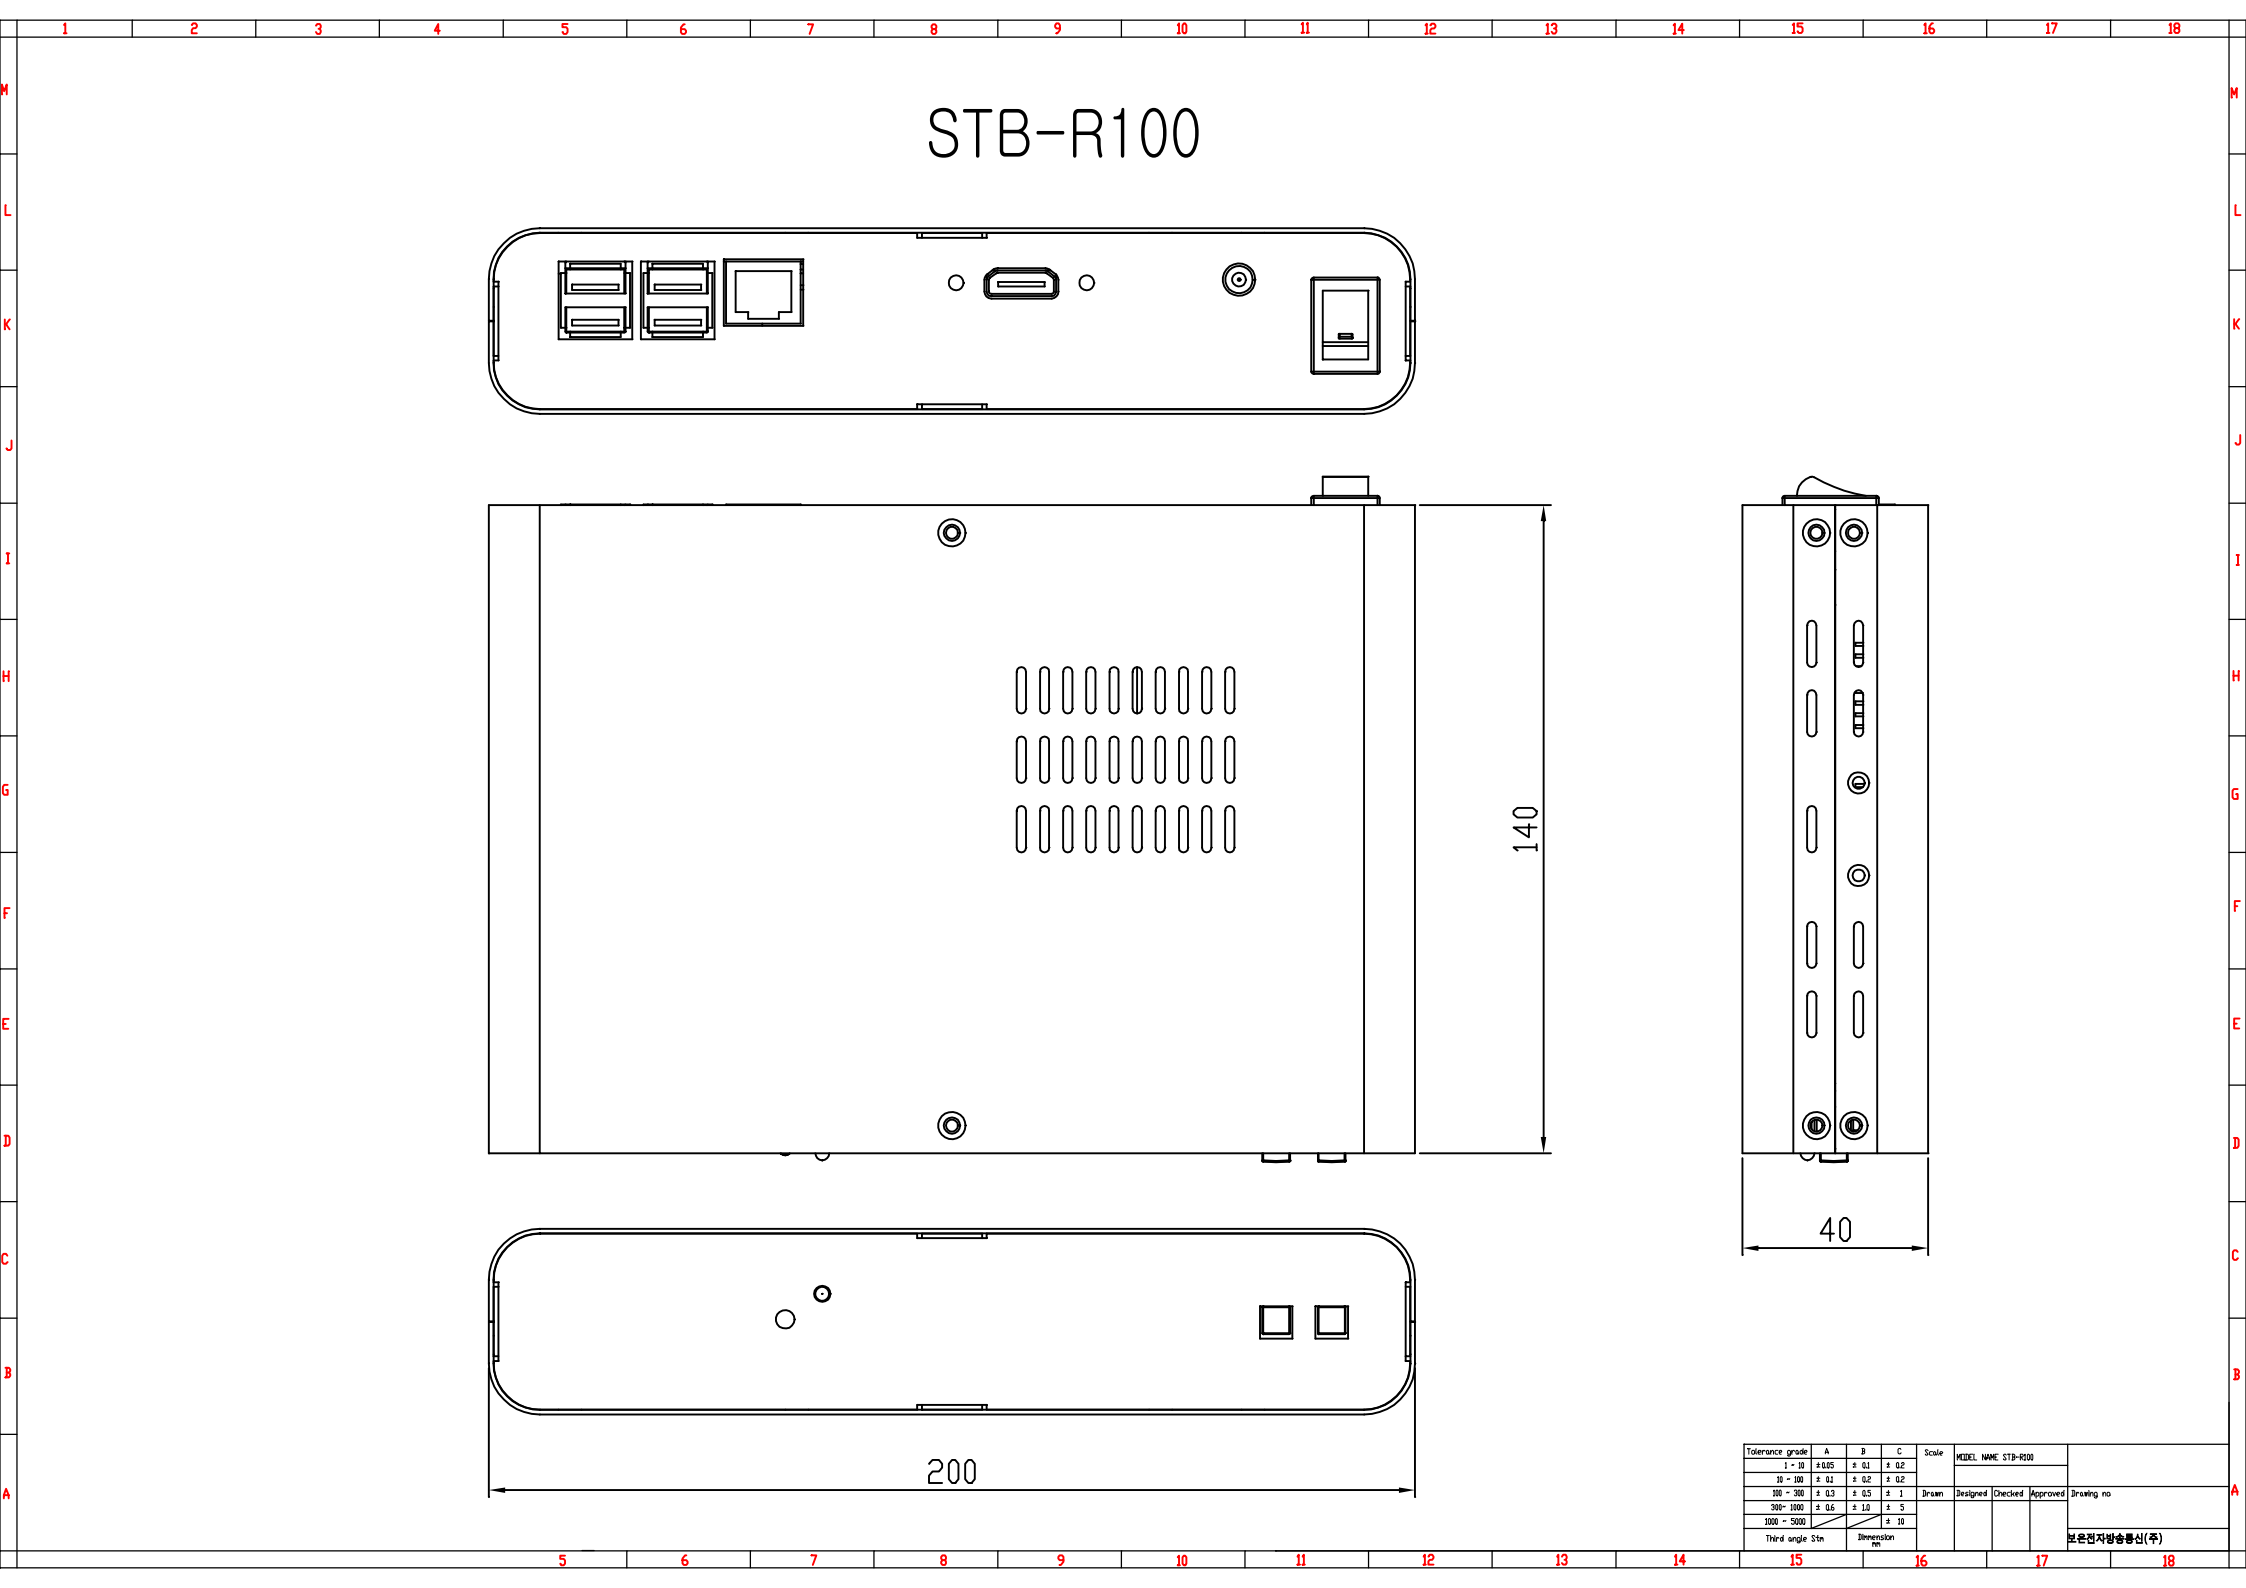

Technical drawing of the STB-R100 device, showing three views: Front View, Top View, and Side View.

**Front View:** The device is rectangular with a width of 200 mm and a height of 140 mm. It features a central ventilation grille consisting of 24 oval slots arranged in three rows of eight. The top edge contains a series of ports and indicators: two USB-A ports, one USB-C port, one Ethernet port, a power button, a power jack, and a status indicator light. The bottom edge has two small rectangular feet.

**Top View:** Shows the top surface of the device, which is flat and rectangular with rounded corners. It features a small rectangular cutout on the right side, likely for a handle or latch.

**Side View:** Shows the side profile of the device, which is 40 mm thick. It features a vertical slot on the right side, likely for a handle or latch, and a small rectangular cutout on the bottom edge.

**Dimensions:**

- Width: 200 mm
- Height: 140 mm
- Thickness: 40 mm

**Table:**

| Tolerance grade | A      | B         | C     | Scale | MODEL NAME | STB-R100 |             |
|-----------------|--------|-----------|-------|-------|------------|----------|-------------|
| 1 - 10          | ± 0.05 | ± 0.1     | ± 0.2 | Drawn | Designed   | Checked  |             |
| 10 - 100        | ± 0.1  | ± 0.2     | ± 0.2 |       |            |          |             |
| 100 - 300       | ± 0.3  | ± 0.5     | ± 1   |       |            |          |             |
| 300 - 1000      | ± 0.6  | ± 1.0     | ± 5   |       |            |          |             |
| 1000 - 5000     | ± 1.0  | ± 1.5     | ± 10  |       |            |          |             |
| Third angle     | Stn    | Dimension | mm    |       |            |          | 보문전자방송통신(주) |